


# Copper Cable Lugs

## DIN Standard

### Type ACUSDT

Material : E-Copper  
Finish : Electro Tinned  
Features : With inspection hole (Also available without inspection hole)

Type Tested as per IEC 61238

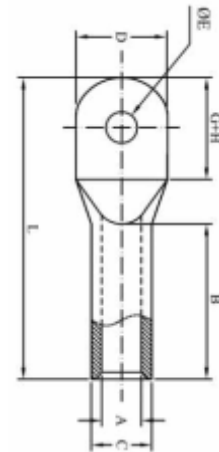

| CABLE<br>mm <sup>2</sup> | ØE   | PART No.     | DIMENSIONS IN mm |      |    |      |    |     |
|--------------------------|------|--------------|------------------|------|----|------|----|-----|
|                          |      |              | A                | C    | D  | G+H  | B  | L   |
| 10                       | 6.4  | ACUSDT10M06  | 4.5              | 7    | 9  | 16   | 10 | 35  |
|                          | 8.4  | ACUSDT10M08  |                  |      | 13 | 20   |    | 37  |
| 16                       | 6.4  | ACUSDT16M06  | 5.5              | 8.5  | 13 | 15.5 | 20 | 44  |
|                          | 8.4  | ACUSDT16M08  |                  |      | 13 | 20   |    | 46  |
| 25                       | 6.4  | ACUSDT25M06  | 7                | 10   | 14 | 15.5 | 20 | 46  |
|                          | 8.4  | ACUSDT25M08  |                  |      | 16 | 20   |    | 48  |
| 35                       | 8.4  | ACUSDT35M08  | 8.2              | 12.5 | 17 | 20   | 20 | 54  |
|                          | 10.5 | ACUSDT35M10  |                  |      | 19 | 24   |    |     |
|                          | 13   | ACUSDT35M12  |                  |      | 21 | 26   |    |     |
| 50                       | 8.4  | ACUSDT50M08  | 10               | 14.5 | 20 | 20   | 28 | 64  |
|                          | 10.5 | ACUSDT50M10  |                  |      | 22 | 24   |    |     |
|                          | 13   | ACUSDT50M12  |                  |      | 24 | 26   |    |     |
| 70                       | 8.4  | ACUSDT70M08  | 11.5             | 16.5 | 24 | 20   | 28 | 67  |
|                          | 10.5 | ACUSDT70M10  |                  |      | 24 | 24   |    |     |
|                          | 13   | ACUSDT70M12  |                  |      | 24 | 26   |    |     |
| 95                       | 10.5 | ACUSDT95M10  | 13.5             | 19   | 28 | 24   | 35 | 78  |
|                          | 13   | ACUSDT95M12  |                  |      | 28 | 26   |    |     |
| 120                      | 10.5 | ACUSDT120M10 | 15.5             | 21   | 32 | 31   | 35 | 86  |
|                          | 13   | ACUSDT120M12 |                  |      | 32 | 33   |    |     |
|                          | 17   | ACUSDT120M16 |                  |      | 32 | 39   |    |     |
| 150                      | 10.5 | ACUSDT150M10 | 17               | 23.5 | 34 | 31   | 35 | 94  |
|                          | 13   | ACUSDT150M12 |                  |      | 34 | 33   |    |     |
|                          | 17   | ACUSDT150M16 |                  |      | 34 | 39   |    | 97  |
| 185                      | 10.5 | ACUSDT185M10 | 19               | 25.5 | 37 | 31   | 40 | 98  |
|                          | 13   | ACUSDT185M12 |                  |      | 37 | 33   |    |     |
|                          | 17   | ACUSDT185M16 |                  |      | 37 | 39   |    | 101 |
| 240                      | 13   | ACUSDT240M12 | 21.5             | 29   | 42 | 33   | 40 | 108 |
|                          | 17   | ACUSDT240M16 |                  |      | 42 | 39   |    | 111 |
|                          | 21   | ACUSDT240M20 |                  |      | 42 | 43   |    | 113 |

# Copper Cable Lugs DIN Standard

## Type ACUSDT

Material : E-Copper  
Finish : Electro Tinned  
Features : With inspection hole (Also available without inspection hole)

**Type Tested as per IEC 61238**

| CABLE<br>mm <sup>2</sup> | ØE | PART No.      | DIMENSIONS IN mm |      |    |     |     |     |
|--------------------------|----|---------------|------------------|------|----|-----|-----|-----|
|                          |    |               | A                | C    | D  | G+H | B   | L   |
| 300                      | 17 | ACUSDT300M16  | 24.5             | 31.0 | 48 | 40  | 50  | 122 |
|                          | 21 | ACUSDT300M20  |                  |      |    |     |     |     |
| 400                      | 17 | ACUSDT400M16  | 27.5             | 38.5 | 54 | 50  | 70  | 140 |
|                          | 21 | ACUSDT400M20  |                  |      |    |     |     |     |
| 500                      | 17 | ACUSDT500M16  | 31.0             | 42.0 | 60 | 50  | 70  | 150 |
|                          | 21 | ACUSDT500M20  |                  |      |    |     |     |     |
| 630                      | 17 | ACUSDT630M16  | 34               | 44   | 62 | 50  | 80  | 160 |
|                          | 21 | ACUSDT630M20  |                  |      |    |     |     |     |
| 800                      | 21 | ACUSDT800M20  | 40               | 52   | 75 | 60  | 100 | 195 |
|                          | 27 | ACUSDT800M25  |                  |      |    |     |     |     |
| 1000                     | 21 | ACUSDT1000M20 | 44               | 58   | 85 | 60  | 100 | 195 |
|                          | 27 | ACUSDT1000M25 |                  |      |    |     |     |     |

